



Product Applications



Terminal System Overview



Housing Overview

Relay sockets


DCS-1



5 & 7 way relay sockets for 6.3 mm female terminals

Features

- Additional terminal locking device pre-assembled on front part of the housing
- Direct attachment to relay carrier
- GO-NO-GO relay locking principle
- Mechanical polarization
- Several colours available

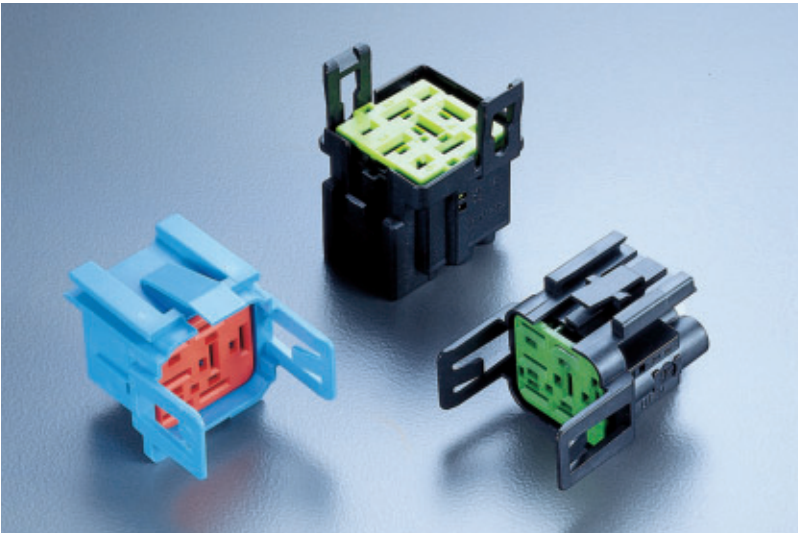

Performance characteristics

- Temperature range: from -40° C to +120° C
- Contact retention force: > 80 N
- Contact insertion force: < 15 N
- Connector mating force: < 160 N

Construction

- Housing material: PBT

Tooling

- Front device removal tool: 65900000
- Terminal removal tooling: 65900200

Connector compatibility

- Usable terminals: DCS-1 6.3 mm female terminals

Overview of DCS housings

Part Numbers	No. of position	Terminal size	Colour
6 023 00 01 (RESTRICTED)	7	6.3 mm	Black
6 043 06 01	5	6.3 mm	Black





Product
Applications



Terminal
System
Overview



Housing
Overview



Table
of Content

Relay sockets

DCS-1




5 & 7 way relay sockets for 6.3 mm female terminals

Dimensional characteristics

Notes:

7 way socket

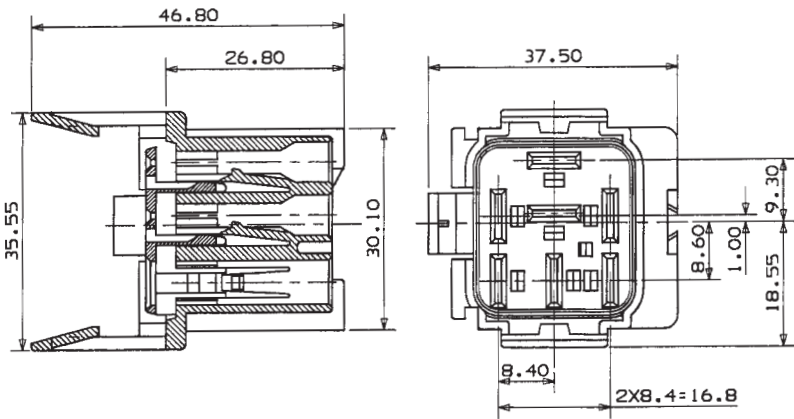

5 way socket

